



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

1804/51973
MAILED 26 OCT 2004

WIPO PCT

Bescheinigung : Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03103787.2

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr:
Application no.: 03103787.2
Demande no:

Anmeldetag:
Date of filing: 14.10.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Power converter

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H02M3/156

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

Power converter

The invention relates to a power converter.

The Philips Semiconductors datasheet for the TEA 152x family shows a Switched Mode Power Supply (SMPS) controller IC that operates directly from a rectified universal mains voltage. Its figure 7 shows an application diagram in which the TEA152xP IC is preceded by an input section that comprises a resistor, a full bridge rectifier, and a filter. The mains voltage is rectified, buffered and filtered in the input section and connected to the primary winding of the transformer. Philips Semiconductors has also published an application note AN00055 for this IC family, of which figure 12 basically shows the same application diagram. Both documents, and more particularly the mentioned figures, are incorporated by reference herein.

It is, inter alia, an object of the invention to provide a cheaper power converter without sacrificing performance. To this end, the invention provides a power converter as defined in the independent claims. Advantageous embodiments are defined in the dependent claims.

The invention is based on the recognition that in the input section before a switched mode power supply IC, a full bridge rectifier can be replaced by a single diode without sacrificing performance for major applications like battery chargers for mobile devices like GSM phones, and standby power supplies. In a preferred embodiment, the SMPS IC is the Philips Semiconductors IC TEA1520P.

These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

In the drawings, Fig. 1 shows a partial circuit diagram of an embodiment of a power converter in accordance with the present invention.

In a preferred embodiment, an AC input voltage V_{mains} is applied to a single diode D connected in series with a non-electrolytic capacitor C_{diff} of typically 100 nF. The capacitor C_{diff} is part of a filter that further comprises an inrush resistor R_{inrush} , a coil L_{diff} , and an electrolytic capacitor C_{in} of typically 10 μF . The DC voltage V_{DC} at the output of the filter is applied to a series connection of a primary winding L_{prim} , a switched mode power supply IC SMPS, and a resistor R_{cs} . While the invention can be used with any commercially available SMPS IC, the SMPS IC is preferably the Philips Semiconductors IC TEA1520P, which is further connected as described in the above-mentioned datasheet and application note. As those further connections are irrelevant to understanding the main idea of this invention, viz. that when such a switched mode power supply is used, a single diode rectifier D can be used rather than a full bridge rectifier without sacrificing performance for major applications, those further connections are not described in the present description. As a further result of this inventive recognition on which the invention relies, i.e. if an SPMS IC is used, the input circuit can be simplified, in comparison with the prior art only a single electrolytic capacitor C_{in} of typically 10 μF is needed for smoothening the output signal of the diode D . As a result, the capacitor C_{diff} can be a non-electrolytic capacitor (typically only 100 nF) that is much smaller than an electrolytic capacitor because it no longer needs to participate in smoothening the output signal of the diode D . The combination of the coil L_{diff} and the non-electrolytic capacitor C_{diff} only serves to filter distortions caused by the SMPS IC so that the mains network is not polluted. For this SMPS-caused distortions filtering function a non-electrolytic capacitor C_{diff} is even preferred as such a non-electrolytic capacitor has a much smaller series resistance than an electrolytic capacitor, so that a better SMPS-caused distortions filter is obtained.

The Philips IC TEA1520P is preferred as it has a high gain feedback loop having a multiplier by a factor 10 as described in Section 3.4 of the above-mentioned application note. This multiplier serves to diminish any 100 Hz ripple caused by using a small mains capacitor.

This Philips IC is also preferred as it has an internal start-up circuit comprising an accurate high-voltage start-up current source instead of a dissipative bleeder resistor, as described in Section 3.4 of the above-mentioned application note. As a result of using a current source, the start-up time is less dependent on the input voltage, which is preferable if a less stable input voltage is applied to the IC.

In a preferred embodiment, an AC input voltage V_{mains} is applied to a single diode D connected in series with a non-electrolytic capacitor C_{diff} of typically 100 nF. The capacitor C_{diff} is part of a filter that further comprises an inrush resistor R_{inrush} , a coil L_{diff} , and an electrolytic capacitor C_{in} of typically 10 μF . The DC voltage V_{DC} at the output of the filter is applied to a series connection of a primary winding L_{prim} , a switched mode power supply IC SMPS, and a resistor R_{cs} . While the invention can be used with any commercially available SMPS IC, the SMPS IC is preferably the Philips Semiconductors IC TEA1520P, which is further connected as described in the above-mentioned datasheet and application note. As those further connections are irrelevant to understanding the main idea of this invention, viz. that when such a switched mode power supply is used, a single diode rectifier D can be used rather than a full bridge rectifier without sacrificing performance for major applications, those further connections are not described in the present description. As a further result of this inventive recognition on which the invention relies, i.e. if an SMPS IC is used, the input circuit can be simplified, in comparison with the prior art only a single electrolytic capacitor C_{in} of typically 10 μF is needed for smoothening the output signal of the diode D . As a result, the capacitor C_{diff} can be a non-electrolytic capacitor (typically only 100 nF) that is much smaller than an electrolytic capacitor because it no longer needs to participate in smoothening the output signal of the diode D . The combination of the coil L_{diff} and the non-electrolytic capacitor C_{diff} only serves to filter distortions caused by the SMPS IC so that the mains network is not polluted. For this SMPS-caused distortions filtering function a non-electrolytic capacitor C_{diff} is even preferred as such a non-electrolytic capacitor has a much smaller series resistance than an electrolytic capacitor, so that a better SMPS-caused distortions filter is obtained.

25

The Philips IC TEA1520P is preferred as it has a high gain feedback loop having a multiplier by a factor 10 as described in Section 3.4 of the above-mentioned application note. This multiplier serves to diminish any 100 Hz ripple caused by using a small mains capacitor.

30

This Philips IC is also preferred as it has an internal start-up circuit comprising an accurate high-voltage start-up current source instead of a dissipative bleeder resistor, as described in Section 3.4 of the above-mentioned application note. As a result of using a current source, the start-up time is less dependent on the input voltage, which is preferable if a less stable input voltage is applied to the IC.

THIS PAGE BLANK (USPTO)

A preferred embodiment can be summarized as follows. The component count of the input section can be reduced in a power converter having an integrated fly-back controller that is able to withstand large voltage variations on the input, preferably Philips Semiconductor' STARplug Family. Fig. 1 shows a typical example, while those skilled in the art will notice that Rinrush and Cdiff can be connected in different ways. In this example, the STARplug IC omits the need for a stabilized DC voltage and therefore reduces the input section component count (reduction of three mains diodes and replacement of one mains electrolytic capacitor by a standard capacitor). All this leads to price and PCB area reduction.

It should be noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the appended claims. In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. The word "comprising" does not exclude the presence of elements or steps other than those listed in a claim. The word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. In the device claim enumerating several means, several of these means may be embodied by one and the same item of hardware. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage.


CLAIMS:

1. A power converter, comprising:
 an input circuit having a single diode rectifier (D); and
 a switched mode power supply IC (SMPS).
- 5 2. A power converter as claimed in claim 1, wherein the input circuit further
 comprises a filter (Rinrush, Cdiff, Ldiff, Cin) having a non-electrolytic capacitor (Cdiff).

ABSTRACT:

A power converter, comprising an input circuit having a single diode rectifier (D); and a switched mode power supply IC (SMPS).

(Fig. 1)

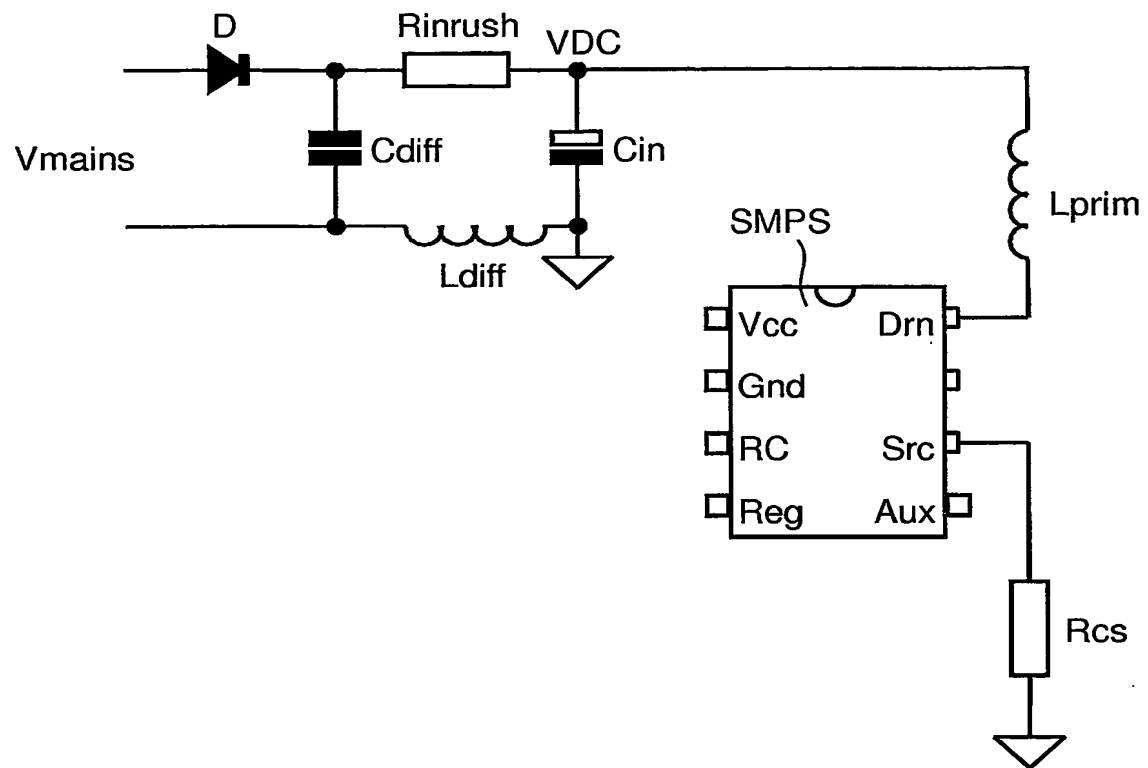

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record.**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.